


HOOK 'N' LOOP WRAP STRAP (BACK TO BACK)

Application

- For sensitive cable bunching which doesn't require industrial strength

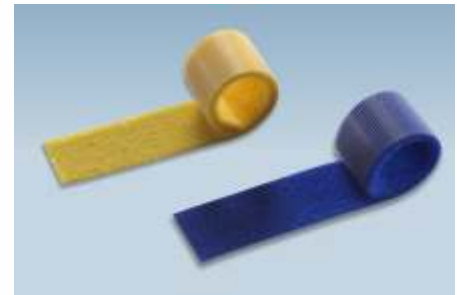

Key Industries

Networking • Telecom

Specification

Material: Hook:	Nylon-66 (PA-66) monofilaments woven
Material: Loop:	Nylon-6 (PA-6) multifilaments woven
Flammability Rating:	UL 94 HB
Color:	Black (std. colour) other colors against order
Operating Temp:	-20°C to +85°C
Peel off Strength:	25N/cm (initial), 2.12N/cm (After 5000 Cycles)
Shear Strength:	10N/cm (initial), 7.5N/cm (After 5000 Cycles)
Packing:	5 Mtrs./ Rol

Features

- Our economical design features a quick & easy bundling of cables & wires

Length (mtrs.)	Width (mm)	Tensile Strength (Kgs)/(lbs)	Std. Colour	CAT No.
5	20.0	19 (42)	Black	HLWS-16
5	20.0	22 (48)	Black	HLWS-20
5	20.0	25 (55)	Black	HLWS-25

Tolerance Dimension (mm): Width - ± 0.5