


# SS BAND HD UNCOATED



## Application

- Cable bundling application for higher tensile load and high vibration
- For various size of cable diameter requirement

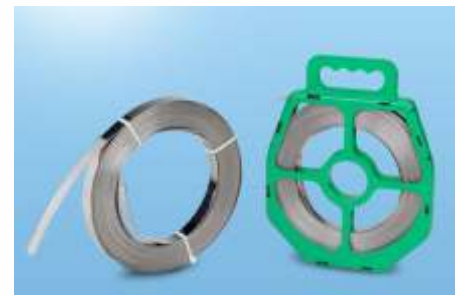

## Key Industries

- Aerospace ● Chemicals & Refineries ● Dairy & Food Processing ● Oil, Gas & Offshore ● Ship & Marines
- Signage & Signals ● Solar ● Telecom ● Utility ● Windmill

## Specification

**Material:** SS 316, SS 201 and Galvanized  
**Installation:** By tool cat no. TB-1  
**Test Certificate:**  
**Packing:** 30.5 Mtrs (100 Ft.)/Roll in box

## Features

- Provides higher tensile strength
- Ideal for use in high vibration application
- Available in cardboard box as well as in plastic totes for easy to carry & use
- Smooth edges of band provide utmost safety while installation

Width		Thickness		SS Grade	Tensile Strength		Used with Buckle/Clip	Package Qty. per Roll	G.wt. / Std. Pkg.		Cat. No.
inchs	mm	inches	mm		Kgs.	Lbs.			Kgs.	Lbs.	
3/16	4.8	0.015	0.38	SS 316	127	280	SBB-4, SBC-4	30.5 Mtrs (100 Ft.)	0.55	1.2	SBH-4
3/16	4.8	0.015	0.38	SS 304	127	280	SBB-4, SBC-4	30.5 Mtrs (100 Ft.)	0.55	1.2	SBH-4/4
3/16	4.8	0.015	0.38	SS 201	158	348	SBB-4, SBC-4	30.5 Mtrs (100 Ft.)	0.55	1.2	SBH-4/1
3/16	4.8	0.015	0.38	Galvanized			SBB-4, SBC-4	30.5 Mtrs (100 Ft.)	0.55	1.2	SBH-4/G
1/4	6.3	0.020	0.51	SS 316	180	397	SBB-6, SBC-6	30.5 Mtrs (100 Ft.)	0.77	1.7	SBH-6
1/4	6.3	0.020	0.51	SS 304	180	397	SBB-6, SBC-6	30.5 Mtrs (100 Ft.)	0.77	1.7	SBH-6/4
1/4	6.3	0.020	0.51	SS 201	226	498	SBB-6, SBC-6	30.5 Mtrs (100 Ft.)	0.77	1.7	SBH-6/1
1/4	6.3	0.020	0.51	Galvanized			SBB-6, SBC-6	30.5 Mtrs (100 Ft.)	0.77	1.7	SBH-6/G
3/8	9.5	0.025	0.63	SS 316	340	750	SBB-9, SBC-9	30.5 Mtrs (100 Ft.)	1.50	3.3	SBH-9
3/8	9.5	0.025	0.63	SS 304	340	750	SBB-9, SBC-9	30.5 Mtrs (100 Ft.)	1.50	3.3	SBH-9/4
3/8	9.5	0.025	0.63	SS 201	408	899	SBB-9, SBC-9	30.5 Mtrs (100 Ft.)	1.50	3.3	SBH-9/1
3/8	9.5	0.025	0.63	Galvanized	317	699	SBB-9, SBC-9	30.5 Mtrs (100 Ft.)	1.50	3.3	SBH-9/G
1/2	12.7	0.030	0.76	SS 316	543	1197	SBB-12, SBC-12	30.5 Mtrs (100 Ft.)	2.30	5.1	SBH-12
1/2	12.7	0.030	0.76	SS 304	543	1197	SBB-12, SBC-12	30.5 Mtrs (100 Ft.)	2.30	5.1	SBH-12/4
1/2	12.7	0.030	0.76	SS 201	680	1499	SBB-12, SBC-12	30.5 Mtrs (100 Ft.)	2.30	5.1	SBH-12/1
1/2	12.7	0.030	0.76	Galvanized	510	1124	SBB-12, SBC-12	30.5 Mtrs (100 Ft.)	2.30	5.1	SBH-12/G
5/8	15.9	0.030	0.76	SS 316	680	1499	SBB-15, SBC-15	30.5 Mtrs (100 Ft.)	2.90	6.4	SBH-15
5/8	15.9	0.030	0.76	SS 304	680	1499	SBB-15, SBC-15	30.5 Mtrs (100 Ft.)	2.90	6.4	SBH-15/4
5/8	15.9	0.030	0.76	SS 201	850	1874	SBB-15, SBC-15	30.5 Mtrs (100 Ft.)	2.90	6.4	SBH-15/1
5/8	15.9	0.030	0.76	Galvanized	636	1402	SBB-15, SBC-15	30.5 Mtrs (100 Ft.)	2.90	6.4	SBH-15/G
3/4	19.0	0.030	0.76	SS 316	815	1797	SBB-19, SBC-19	30.5 Mtrs (100 Ft.)	3.50	7.7	SBH-19
3/4	19.0	0.030	0.76	SS 304	815	1797	SBB-19, SBC-19	30.5 Mtrs (100 Ft.)	3.50	7.7	SBH-19/4
3/4	19.0	0.030	0.76	SS 201	1020	2249	SBB-19, SBC-19	30.5 Mtrs (100 Ft.)	3.50	7.7	SBH-19/1
3/4	19.0	0.030	0.76	Galvanized	765	1686	SBB-19, SBC-19	30.5 Mtrs (100 Ft.)	3.50	7.7	SBH-19/G